


3-POINT BUNDLING MACHINE *eco* FIXED

- // Rotation angle fixed
- // Transport 3-point linkage
- // Ejection hydraulic

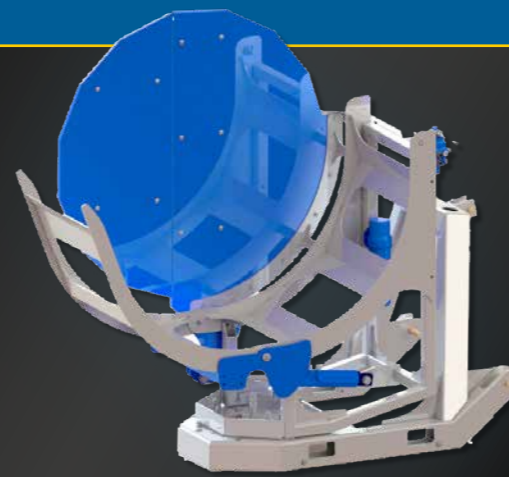

TYPE		BUNDLE DIAMETER	WEIGHT	ARTICLE NO.	PRICE
		mm	kg		
Bundling machine 1,0 rm	fixed	ø 1200	240	MS-Z3B-7	1 290,-
Bundling machine 1,4 rm	fixed	ø 1380	250	MS-Z3B-8	1 390,-
EQUIPMENT				ARTICLE NO.	PRICE
Control unit on the tractor (tractor hydraulics)			•	SP-Z3B-1	-
Control unit on the bundling machine			○	SP-Z3B-2	280,-
Lashing straps 25 mm 5 m - for 1,4 rm bundling machine / per piece			○	SP-ZAL-45	6,-

3-POINT BUNDLING MACHINE *proline* ROTATEBLE

- // Rotation angle 180°
- // Transport 3-point linkage
- // Ejection hydraulic



TYPE		BUNDLE DIAMETER	WEIGHT	ARTICLE NO.	PRICE
		mm	kg		
Bundling machine 1,0 rm	with slew ring	ø 1200	250	MS-Z3B-1	1.760,-
Bundling machine 1,4 rm	with slew ring	ø 1380	260	MS-Z3B-2	1.960,-
EQUIPMENT				ARTICLE NO.	PRICE
Control unit on the tractor (tractor hydraulics)			•	SP-Z3B-1	-
Control unit on the bundling machine			○	SP-Z3B-2	280,-
Lashing straps 25 mm 5 m - for 1,4 rm bundling machine / per piece			○	SP-ZAL-45	6,-



/// EFFICIENT LOADING AND STORAGE

For efficient loading and storage, our upright log splitters can be combined with a range of bundling machines. These can be mounted on the splitter itself or on the tractor using the three-point linkage (Cat. I and II) fitted ex works.